

# Entrance Mats & anti slip



Architectural Building Products

## Doormat

- Type: TL2
- Description: Stair nosing for slip-resistant insert, made of aluminium
- Application: protection of the stair nosing's corners
- Length of the profile: 1 m , 1.2 m , 1.5 m , 2 m , 3 m , 6 m
- Width of the profile: 50 mm
- Height of the profile: 30 mm
- Alloy of the profile: Aluminium 6063
- Anodized colours: silver, gold,
- Additional colours: aluminium polished
- Fixation: screwing, countersunk drilled holes 3,5 mm

### Installation/Laying

1. The metal stair nosings have countersunk holes in their dovetailing guides (into which the inserts are subsequently fitted). They are fastened on the step by screwing them (for stair use dowels). A perfect glue bond was successfully obtained.
2. The PVC-insert should be cut to the desired fixed size in cold condition.
3. The two next expansion joint on the back side allow to compress the tempered insert (at room temperature) and to fix it easily overhand into the dovetailing guide of the metal stair nosing

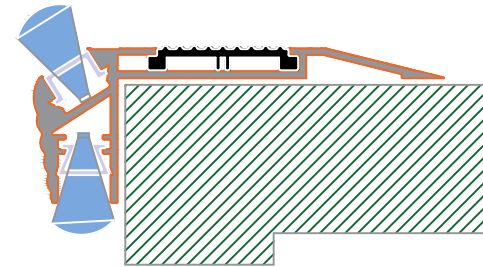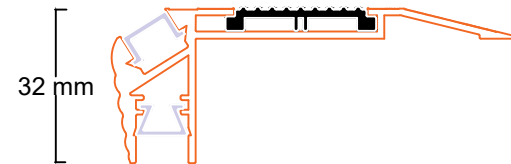

Customer :

design by : kaheh

Project code : T2

Sales Rep :

DOORMAT **دورمات**